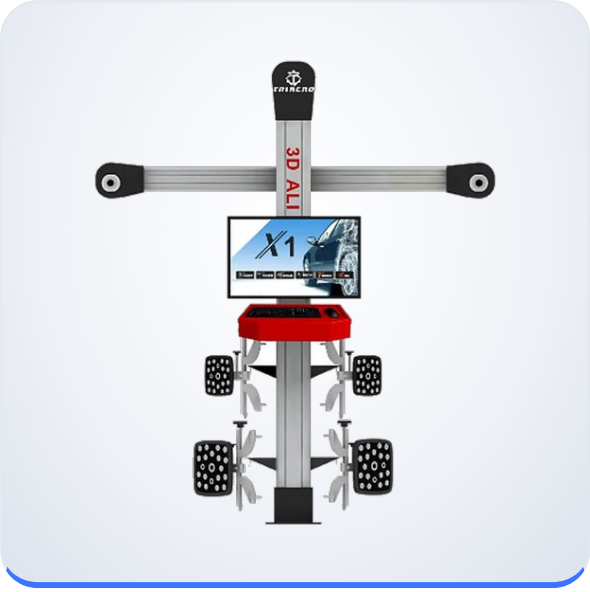


Presentation image. Final colour may vary.

**Ref. HE-G802**

# Compact 3D wheel aligner

**The same 3D accuracy in a smaller footprint, for workshops where space counts.**

3D wheel aligner: the cameras track four targets clamped to the wheels and calculate every angle in seconds, with no cables or sensors on the wheels. Compact column with a 32-inch HD screen and 5-megapixel Sony camera: 155 kg and under 0.9 m³ to install.

## Technical specifications

| | |
|---|---|
| Measurements | Toe, camber, caster, setback, king pin inclination, thrust angle, axle and wheel offset, single-wheel and lifted-vehicle measurement |
| Display | 32-inch HD |
| Cameras | Sony 5 MP |
| Wheel clamps | 11 to 25 inches |
| Targets | 4 × 22 × 22 cm |
| Turntables | 2 |
| Power | 260 W |
| Power supply | 110 V / 220 V |

## Key features

- Small footprint, 155 kg
- 32-inch HD screen, 5 MP Sony camera
- 4 clamps for 11 to 25-inch rims and 4 targets 22 × 22 cm

## How to use

- Wheel alignment checks and adjustment
- Before or after replacing front suspension parts
- Check after fitting new tyres

## Packaging and delivery

| Version | Reference |
|---|---|
| Single model | HE-G802 |

Package dimensions : package 1: 284.6 × 37.6 × 41.1 cm; package 2: 88.6 × 52.6 × 92.8 cm · Package weight : 155 kg (0.88 m³)

This product is available from Humming distributors. Find the one nearest to you.



Humming is a brand of Maestro Équipement. All rights reserved.